


Fitting Instructions Bracket Panthera S2/U2/S3/U3 art.nr: 30053

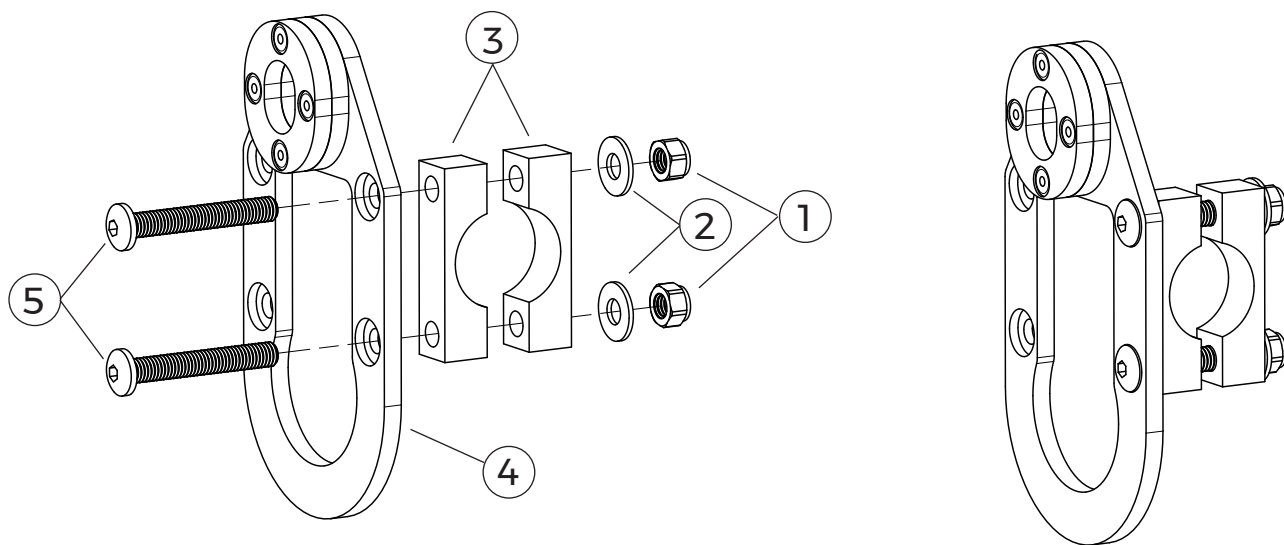

Part list			
Pos.	Art. nr.	Description	Remark/Qty
1	50101	M5 Lock Nut	4
2	50062	Washer M5 FZB	4
3	50044	Clamp Panthera	4
4	30052	Bracket S2 S3 U2 U3	2
5	50102	M5x35	4

Fitting Instructions Bracket

Panthera S2/U2/S3/U3

art.nr. 30053

Tools needed

Hex key 3 mm
Socket wrench 8 mm

Check that all parts are included

See part list

Mounting

- Details for mounting, Pic 1 & Pic 2.
- Mount the screws through the adapter and in to the first clamp.
- Mount the bracket on the axel.
- Mount clamp, washer and lock nut., Pic 3 and Pic 4.
- There need to be a clamp on each side of the frame.
- Tighten screws and lock nut. Use Hex key 3 mm and socket wrench 8 mm.
- Recommended torque when tightning: 4 Nm.
- Make sure that the loch nuts are tightend so the bracket can't be moved.
- Mount a wheel to make sure that the spike of the wheels fits in to the bracket according to pic 5.
- Video is available at www.gearwheel.se.



Pic 1: Details for mounting




Pic 2: Bracket



Pic 3: Mounted bracket



Pic 4: mounted bracket from inside

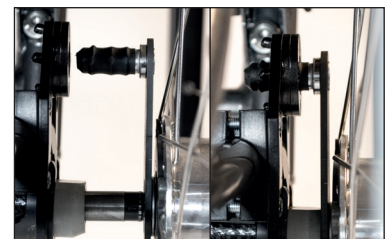

Pic 5: Fitting with the wheel